

Technical data

Cayros mounted ploughs



Model	Body to body clearance (cm)	Furrow width (cm)	Beam height (cm)	Wheel track inner dimension (mm)	max. kW (hp)	Weight of the base machine (kg)*									
						2 furrow		3 furrow		4 furrow		5 furrow		6 furrow	
Option						S	S	S	S	S	S	S	S		
M 950 ²⁾	95	36 ¹⁾ /40/44/48	78	950–1,500	88 (120)	575	680	730	895	890	1,110	–	–		
M 1020	102					580	–	735	–	895	–	–	–		
XM 950	95	36 ¹⁾ /40/44/48	78/82 for S ploughs 78	1,050–1,650	103 (140)	–	865	1,030	1,010	1,230	–	–			
XM 1050	105					–	870	–	1,015	–	–	–			
XMS 850	85	32/36/40/44	78/82 for S ploughs 1,250 to 1,850	1,050 to 1,650 for S ploughs	132 (180)	–	975	1,140	1,150	1,370	1,345	1,620	–		
XMS 950	95	36 ¹⁾ /40/44/48				–	980	1,145	1,160	1,380	1,360	1,635	–		
XMS 1050	105					–	985	1,150	1,170	1,390	1,375	–	–		
XS pro 1050	105	36/40/44/48	82/90	1,050–1,850	279 (380)	–	–	1,375	–	1,610	–	1,835	–		


* Weight depends on beam height, plough bodies and optional equipment

¹⁾ not possible for 1050-S variant (disc coulters in front of each body)

²⁾ also available as a V plough



Cayros V mounted ploughs

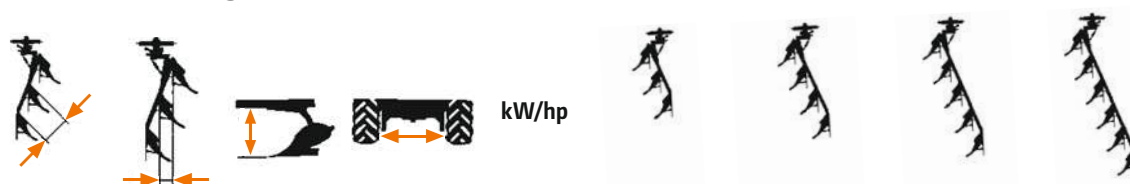

Model	Body to body clearance (cm)	Furrow width (cm)	Beam height (cm)	Wheel track inner dimension (mm)	max. kW (hp)	Weight of the base machine (kg)*							
						3 furrow		4 furrow		5 furrow		6 furrow	
Option							VS		VS		VS		VS
M 950 V	95	32 – 52	78	950 to 1,500 for S ploughs 1,150 to 1,700	88 (120)	800	965	975	–	–	–	–	–
XM 950 V	95	32 – 52	78/82 for S ploughs 78	1,050 to 1,650 for S ploughs 1,250 to 1,850	103 (140)	950	1,115	1,110	1,330	–	–	–	–
XM 1050 V	105					955	–	1,115	–	–	–	–	–
XMS 850 V	85	32 – 52	78/82	1,050 to 1,650 for S-ploughs 1,150 to 1,850	132 (180)	985	1,270	1,240	1,530	1,515	1,810	–	–
XMS 950 V	95					990	1,280	1,250	1,540	1,530	1,825	–	–
XMS 1050 V	105					995	1,290	1,260	1,550	1,545	–	–	–
XS pro 950 V	95	32 – 55	82/90 for S ploughs 82	1,050 to 1,850 for S ploughs 1,250 to 2,050	279 (380)	–	–	1,890	–	2,295	–	2,695	
XS pro 1050 V	105					–	1,755	–	1,960	–	2,215	–	
XS pro 1150 V	115					–	1,770	–	1,980	–	–	–	

* Weight depends on beam height, plough bodies and optional equipment

Illustrations, content and technical data are not binding and may differ depending on the level of equipment. Country-specific road traffic regulations apply and must be complied with, meaning that special approval may be required. The permissible axle loads and total weights of the tractor should be checked. Not all the listed combination options are possible with all tractor manufacturers.